


Typ w obudowie

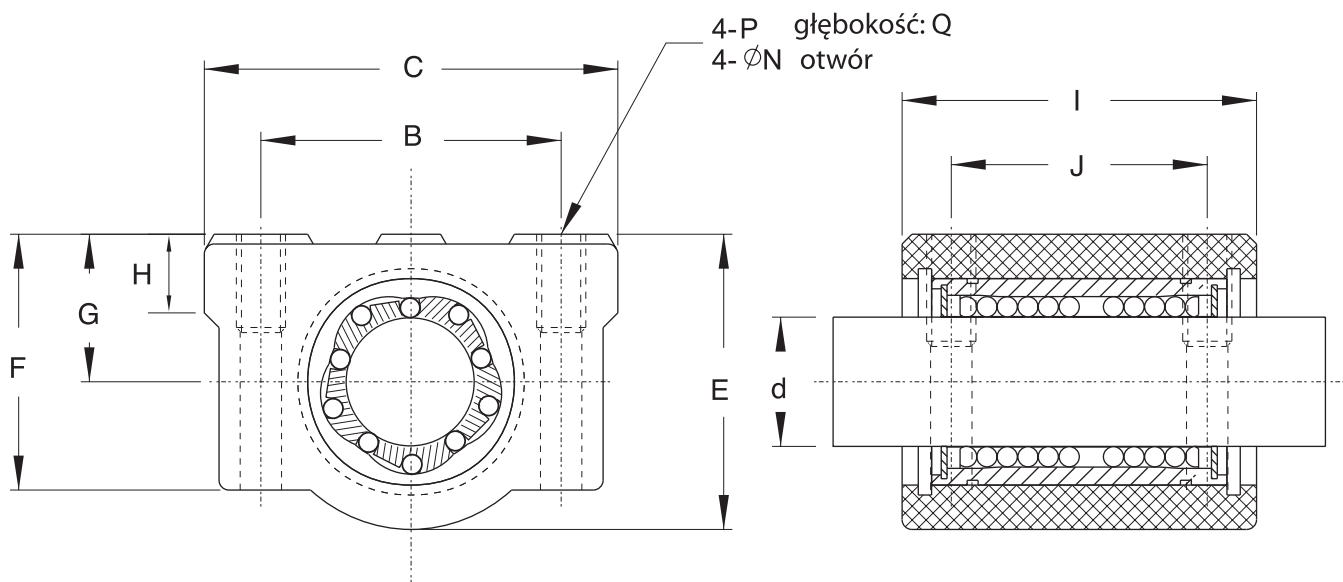

[mm]

Model	Podstawowe wymiary											Nośność (kgf)		Waga (g)
	d	B	C	E	F	G	H	I	J	N	P	Ca	Coa	
SC8UU	8	24	34	22	18	11	6	30	18	3.4	M4	28	40	52
SC10UU	10	28	40	26	21	13	8	35	21	4.3	M5	38	56	92
SC12UU	12	30.5	42	28	24	15	8	36	26	4.3	M5	52	80	102
SC13UU	13	33	44	30	24.5	15	8	39	26	4.3	M5	52	80	120
SC16UU	16	36	50	38.5	32.5	19	9	44	34	4.3	M5	79	120	200
SC20UU	20	40	54	41	35	21	11	50	40	5.2	M6	90	140	255
SC25UU	25	54	76	51.5	42	26	12	67	50	7	M8	100	160	600
SC30UU	30	58	78	59.5	49	30	15	72	58	7	M8	160	280	735
SC35UU	35	70	90	68	54	34	18	80	60	7	M8	170	320	1100
SC40UU	40	80	102	78	62	40	20	90	60	8.7	M10	220	410	1590
SC50UU	50	100	122	102	80	52	25	110	80	8.7	M10	390	810	3340

UU - z uszczelnieniami na zakończeniach