
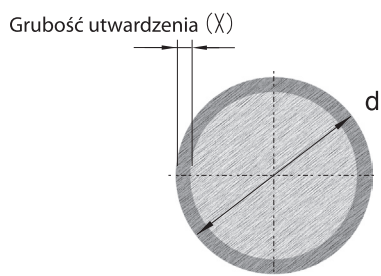


Wałki szlifowane


Materiał: CF53 Twardość: HRC60Up
 Chropowatość powierzchni: Ra 0.15 - 0.35 μm
 Prostoliniowość: około 0.1 mm/m

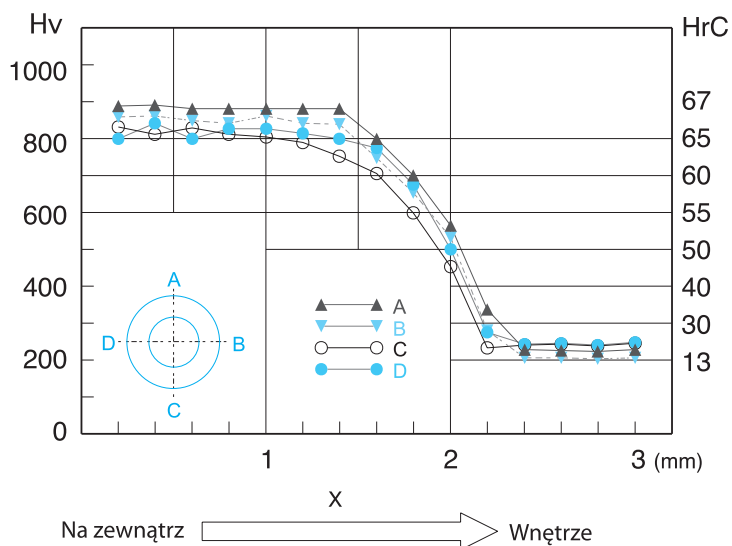

Model	d	Długość													Grubość utwardzenia (X)	
		1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500		
SF/SCF	4															1.0
SF/SCF	6															1.0
SF/SCF	8															1.0
SF/SCF	10															1.0
SF/SCF	12															1.6
SF/SCF	16															1.6
SF/SCF	20															2.2
SF/SCF	25															2.2
SF/SCF	30															2.2
SF/SCF	32															2.5
SF/SCF	40															2.5
SF/SCF	50															2.5