



Łożysko liniowe otwarte LME

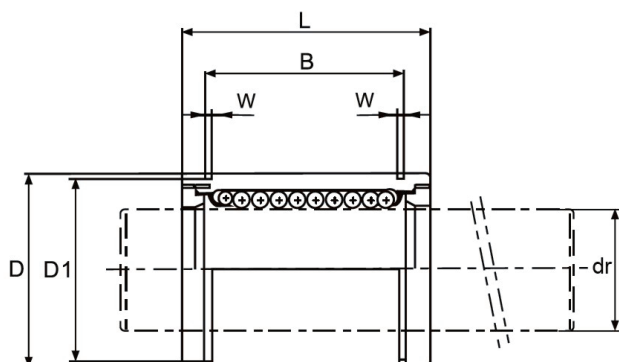

LME -OP

Model	Średnica wałka	Wymiary [mm]								Nośność		Waga [g]
		D	dr	L	B	W	D1	h1	θ	C [N]	Co [N]	
LM12UU-OP	12	21	12	30	23	1,3	20	8	80°	510	784	42
LM16UU-OP	16	28	16	37	26,5	1,6	27	11	80°	774	1180	76
LM20UU-OP	20	32	20	42	30,5	1,6	30,3	11	60°	882	1370	100
LM25UU-OP	25	40	25	59	41	1,85	38	12	50°	980	1570	240
LM30UU-OP	30	45	30	64	44,5	1,85	43	15	50°	1570	2740	270
LM35UU-OP	35	52	35	70	49,5	2,1	49	17	50°	1670	3140	425
LM40UU-OP	40	60	40	80	60,5	2,1	57	20	50°	2160	4020	654
LM50UU-OP	50	80	50	100	74	2,6	76,5	25	50°	3820	7940	1700
LM60UU-OP	60	90	60	110	85	3,15	86,5	30	50°	4700	10000	2000