



INDUSTRIAL SHOCK ABSORBER

SIZE M8X0.75



PowerStop®

- ▶ Angle of Impact max. 2 [°]
- ▶ Weight with locknut 15 [g]
- ▶ Piston return time 0.15 [s]
- ▶ Min. return force 1 [N]
- ▶ Max. return force 4 [N]
- ▶ Permitted temperature range -10 ... +70 [°C]

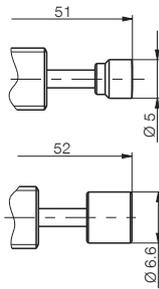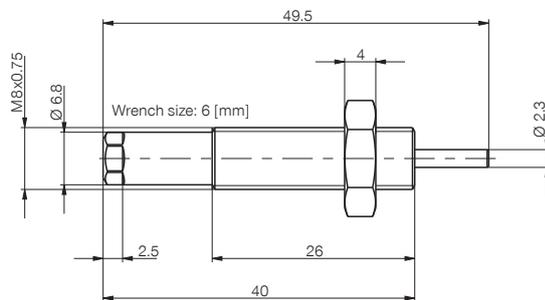



S: assembled with steel head

K: assembled with plastic head



		▶ Technical data					
		Max. energy absorption		Stroke	Impact speed		
Order No.	HIGH ENERGY	Continuous operation	Emergency stop operation		[mm]	min.	max.
		per stroke	per hour	per stroke		[m/s]	
		[Nm]	[Nm/h]	[Nm]			
M8X0.75MK		4	9,000	-	5	0.8	2.2
M8X0.75MS		4	9,000	-	5	0.8	2.2
M8X0.75M		4	9,000	-	5	0.8	2.2
M8X0.75SK		3	8,000	-	5	1.8	3.5
M8X0.75SS		3	8,000	-	5	1.8	3.5
M8X0.75S		3	8,000	-	5	1.8	3.5

		▶ Technical data					
		Max. energy absorption		Stroke	Impact speed		
Order No.	STANDARD ENERGY	Continuous operation	Emergency stop operation		[mm]	min.	max.
		per stroke	per hour	per stroke		[m/s]	
		[Nm]	[Nm/h]	[Nm]			
M8X0.75RMK		1.5	5,000	-	5	0.8	2.2
M8X0.75RMS		1.5	5,000	-	5	0.8	2.2
M8X0.75RM		1.5	5,000	-	5	0.8	2.2
M8X0.75RSK		1.5	5,000	-	5	1.8	3.5
M8X0.75RSS		1.5	5,000	-	5	1.8	3.5
M8X0.75RS		1.5	5,000	-	5	1.8	3.5



①



③

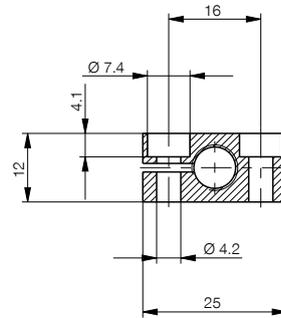

②

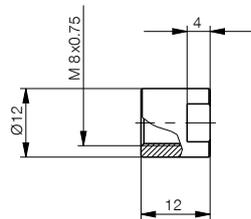

► Size: **M8X0.75**

Pos.	Accessories	Weight	Order no.
①	Steel locknut	3 [g]	MSM8X0.75
①	Stainless steel locknut	3 [g]	MVM8X0.75
②	Stop sleeve*	10 [g]	MAH8X0.75
③	Clamping flange	20 [g]	MKF8X0.75

Maximum fastening torque of locknut: 6 [Nm]

*inclusive Stainless-Steel locknut MVM